


# Braeburn®

# 7205

**Up to 3 Heat / 2 Cool Heat Pump  
Up to 2 Heat / 2 Cool Conventional  
Smart Wi-Fi Universal Thermostat**



**BlueLink**  
smart connect

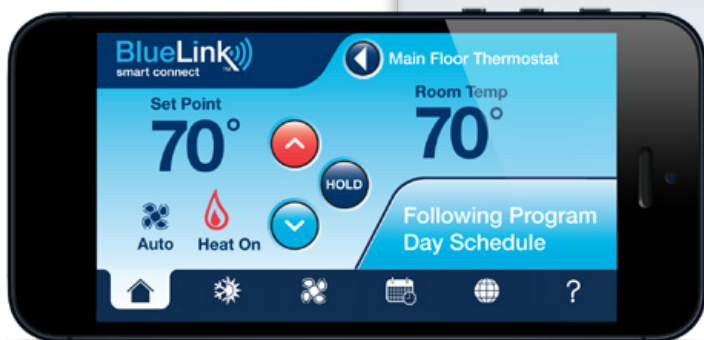

**5 YEAR**  
LIMITED  
WARRANTY

Phone not included.

## Thermostat Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 3 sq. in. Backlit Display
- Bright Blue Backlight
- Auto or Manual Changeover
- User and Installer Lock Modes
- SmartLimit™ Temperature Limits
- Auxiliary Heat Fossil Fuel Option
- Hardwire or Battery Powered
- Circulating Fan Mode
- Wi-Fi works without common (C) wire on most systems; requires common on Heat Pump, Heat Only or Cool Only Systems

## Application Features

- Compatible with Virtually All Smartphones, Tablets or PC's
- Multi-Color Program Groups Simplify Scheduling
- Text and E-Mail Service and Temperature Alerts
- BlueLink QuickCopy® Allows User to Duplicate Program and Configuration to Other Thermostats
- QuickEdit® Makes Schedule Changes Easy
- BlueLink SmartData® Energy Report Capability
- Monitor and Control Multiple Thermostats
- Easy Access Dealer Information
- Optional Geofencing for Increased Energy Savings



**FREE Color Contractor Branding!**  
Visit [braeburnonline.com](http://braeburnonline.com)

**Compatible with Amazon Alexa**

Amazon Alexa is a trademark of Amazon.com, Inc.

[www.bluelinksmartconnect.com](http://www.bluelinksmartconnect.com)

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

# Braeburn®

## BlueLink Smart Connect® Application Screens




### Multi-Color Program Groups

Simplifies program scheduling by allowing user to group days and walk through programming set points, times and temperatures quickly and easily.



### BlueLink SmartData® Energy Reports


Gives the user the capability of retrieving usage data for individual thermostats for specific time periods.

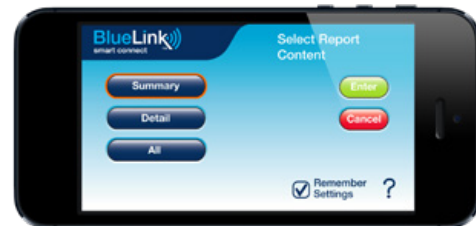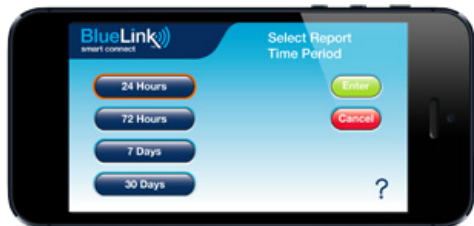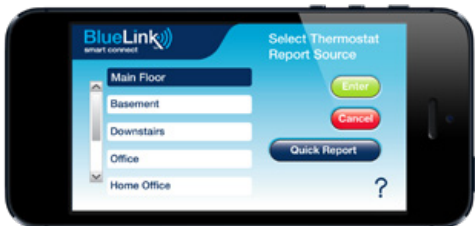

### Geofencing



### BlueLink QuickCopy® Feature

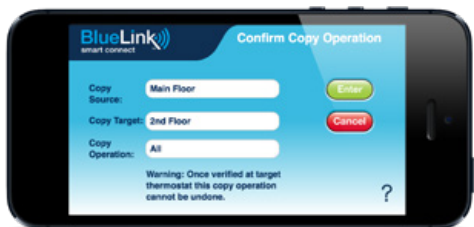

### Service and Temperature Alerts



### Product Specifications

<b>Dimensions:</b>	3.70" x 5.16" x 1.38"
<b>Electric Rating:</b>	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 5 amp total maximum load (all terminals)
<b>AC Power:</b>	18-30 Volt AC
<b>DC Power:</b>	3.0 Volts DC (2 "AA" Alkaline batteries included)
<b>To Use Wi-Fi:</b>	Wi-Fi works without common (C) wire on most systems; requires common on Heat Pump, Heat Only or Cool Only Systems
<b>Compatibility:</b>	Heat pump systems up to 3 heat/2 cool, Conventional systems up to 2 heat/2 cool
<b>Wi-Fi Communication:</b>	802.11
<b>Control Range:</b>	45° to 90° F (7° to 32° C)
<b>Display Range:</b>	40° to 99° F (5° to 37° C)
<b>Accuracy:</b>	+/- 1° F (+/- .5° C)
<b>Terminations:</b>	Rh, Rc, C, W2, W1/E/W3, O/B, G, Y2, Y1, K

### Shipping Information

<b>INDIVIDUAL CARTON</b>
<b>Dimensions:</b> 4.5" x 5.75" x 2.25"
<b>Weight:</b> 1.0 lbs.

<b>MASTER CARTON</b>
<b>Quantity:</b> 3
<b>Dimensions:</b> 7.15" x 6" x 4.7"
<b>Cubic Feet:</b> .14
<b>Weight:</b> 3.25 lbs.

### Braeburn 7205 Replaces\*

<b>Honeywell®</b> TH8732WF, TH6220WF	<b>Pro1®</b> T855i, T701i
<b>Emerson®</b> 1F86U-42WF	<b>Nest®</b> T100577, T200577, T3007ES

\*Verify specific application requirements. All trademarks are the property of their respective owners.

### Accessories

<b>7340</b> Share-a-Wire® Module	<b>2920</b> Vertical J-Box Adapter Wall Plate (6.5" x 5.1")
<b>5970</b> Universal Thermostat Guard	<b>2950</b> Universal Wall Plate (6.5" x 6.5")

**FREE Contractor Branding Available!** Visit our website ([www.braeburnonline.com](http://www.braeburnonline.com)) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.