

Braeburn[®]

Wireless Setup Guide

BlueLink[®]



Model 7500 Universal Programmable Wireless Thermostat Kit


**Leave this Setup Guide
with thermostat.**

1 Getting Started

1.1 Install and wire the control module to the HVAC equipment (see *Installer Guide, Section 2, Part 1*).


1.2 Install 2 supplied AA batteries into the thermostat (See *Installer Guide, Section 2, Part 4*).


NOTE: Thermostat can be battery powered or 24 VAC powered (hardwired). If multiple wireless remote sensors are used, it is recommended to hardwire the thermostat.

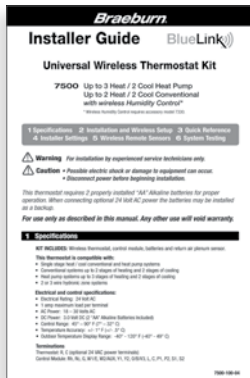

2 Pair the Thermostat and Control Module

2.1 On the thermostat, press and hold down the **HOLD** and **RETURN** buttons for 3 seconds.

2.2 The word **CMOD** (control module) will appear in the display and the  symbol will flash (see *Figure 1*).

NOTE: If the control module has already been paired, the  symbol will not be flashing. To reset wireless connection to control module, see *Installer Guide, Section 4*.

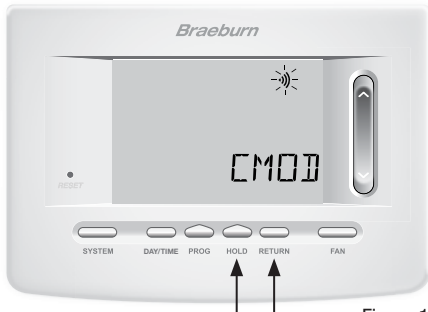



Figure 1

2.3 On the powered control module, press and hold the **CONNECT** button for 3 seconds (see Figure 2).

2.4 The control module will enter pairing mode for 60 seconds. During this time the blue **COMM** indicator on the control module will flash once every 2 seconds.

2.5 Once successfully paired, the  symbol will stop flashing and the blue **COMM** indicator on the control module will turn on.

2.6 Press **RETURN** on the thermostat at any time to exit.

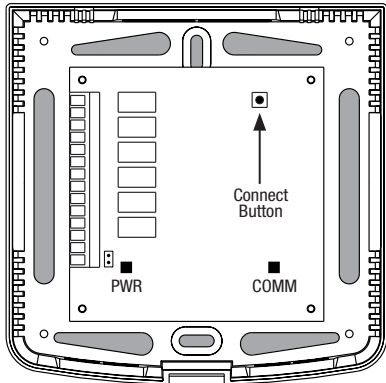


Figure 2

NOTE: If pairing was unsuccessful, try moving the thermostat or repositioning the control module.

3 *Complete Installation*

- 3.1** Mount the thermostat (*see Installer Guide, Section 2, Parts 2-5*).
- 3.2** If applicable, install and connect any wireless remote accessories (*see Accessory Manual*).
- 3.3** Configure Thermostat Installer Settings based on your particular application (*see Installer Guide, Section 4*).
- 3.4** If desired, adjust User Settings, Time of Day and Program Schedule (*see User Manual*).
- 3.5** Test system (*see Installer Guide, Section 6*).

Braeburn[®]

Braeburn Systems LLC

2215 Cornell Avenue • Montgomery, IL 60538

Technical Assistance: www.braeburnonline.com

844-BLU-LINK (844-258-5465) (U.S.)

630-844-1968 (Outside the U.S.)

©2018 Braeburn Systems LLC • All Rights Reserved • Made in China.

7500-105-02